

***Conversion instructions for a  
visual sowing shaft monitor  
on the PS 120-500***



Version: 03/2013, v1.0


**So that the sowing shaft can also be visually monitored on your PS, the following parts must be installed:**

- a PS120-500
- one sowing shaft monitor unit (visual)



**The conversion is performed as follows:**


1. Remove the sowing shaft cover from your PS.
2. Unscrew the M10 nut (17mm wrench) from the agitator.

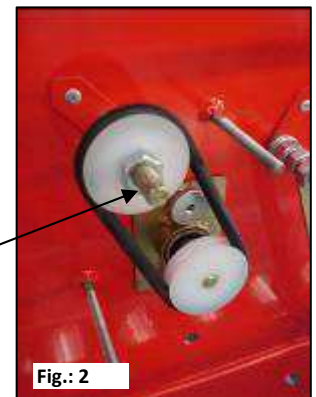

3. Fix the supplied indicator to the agitator shaft (M10 threading) (with 2x 17mm wrenches).



4. Using the supplied drill hole pattern, drill the required hole (22mm) in the sowing shaft cover.

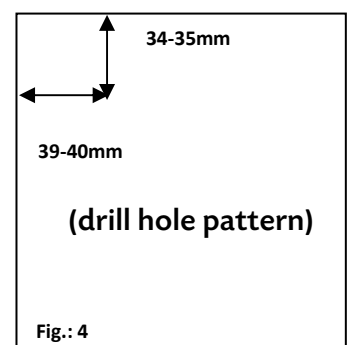

5. Re-attach the sowing shaft cover to the PS.

